


PCT

WORLD INTELLECTUAL PROPERTY ORGANIZATION
International Bureau

INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(51) International Patent Classification ⁷ : C07F 15/00, C08F 10/02, 4/70	A1	(11) International Publication Number: WO 00/58320 (43) International Publication Date: 5 October 2000 (05.10.00)
<p>(21) International Application Number: PCT/GB00/01023</p> <p>(22) International Filing Date: 17 March 2000 (17.03.00)</p> <p>(30) Priority Data: 9907154.0 29 March 1999 (29.03.99) GB</p> <p>(71) Applicant (for all designated States except US): BP CHEMICALS LIMITED [GB/GB]; Britannic House, 1 Finsbury Circus, London EC2M 7BA (GB).</p> <p>(72) Inventors; and (75) Inventors/Applicants (for US only): BAUGH, Simon [GB/GB]; 19 Thistlecroft Road, Hersham, Surrey KT12 5WZ (GB). GIBSON, Vernon, Charles [GB/GB]; Flat 2, 46 Prince's Gate, Exhibition Road, London SW7 2QA (GB).</p> <p>(74) Agent: SMITH, Julian, Philip, Howard; BP International Limited, Patents & Agreements, Chertsey Road, Sunbury-on-Thames, Middlesex TW16 7LN (GB).</p>	<p>(81) Designated States: AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BY, CA, CH, CN, CR, CU, CZ, DE, DK, DM, DZ, EE, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, NO, NZ, PL, PT, RO, RU, SD, SE, SG, SI, SK, SL, TJ, TM, TR, TT, TZ, UA, UG, US, UZ, VN, YU, ZA, ZW, ARIPO patent (GH, GM, KE, LS, MW, SD, SL, SZ, TZ, UG, ZW), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, CH, CY, DE, DK, ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, GW, ML, MR, NE, SN, TD, TG).</p> <p>Published With international search report.</p>	
<p>(54) Title: PYRIDINE-IMINE POLYMERISATION CATALYSTS</p> <div style="text-align: center;">  <p>(I)</p> </div> <p>(57) Abstract</p> <p>A complex suitable for use as a catalyst in the polymerisation of 1-olefins is disclosed, having Formula (I) wherein M is Fe[III], Fe[III], Co[I], Co[II], Co[III], Mn[I], Mn[II], Mn[III], Mn[IV], Ru[II], Ru[III] or Ru[IV]; T is the oxidation state of the metal M; X represents an atom or group covalently or ionically bonded to the metal M; b is the valency of the atom or group X; R¹ to R⁹ are each independently selected from hydrogen, halogen, hydrocarbyl, substituted hydrocarbyl, heterohydrocarbyl, substituted heterohydrocarbyl or SiR'₃ where each R' is independently selected from hydrogen, halogen, hydrocarbyl, substituted hydrocarbyl, heterohydrocarbyl, substituted heterohydrocarbyl, except that R⁹ is not heterohydrocarbyl or substituted heterohydrocarbyl.</p>		

FOR THE PURPOSES OF INFORMATION ONLY

Codes used to identify States party to the PCT on the front pages of pamphlets publishing international applications under the PCT.

AL	Albania	ES	Spain	LS	Lesotho	SI	Slovenia
AM	Armenia	FI	Finland	LT	Lithuania	SK	Slovakia
AT	Austria	FR	France	LU	Luxembourg	SN	Senegal
AU	Australia	GA	Gabon	LV	Latvia	SZ	Swaziland
AZ	Azerbaijan	GB	United Kingdom	MC	Monaco	TD	Chad
BA	Bosnia and Herzegovina	GE	Georgia	MD	Republic of Moldova	TG	Togo
BB	Barbados	GH	Ghana	MG	Madagascar	TJ	Tajikistan
BE	Belgium	GN	Guinea	MK	The former Yugoslav Republic of Macedonia	TM	Turkmenistan
BF	Burkina Faso	GR	Greece	ML	Mali	TR	Turkey
BG	Bulgaria	HU	Hungary	MN	Mongolia	TT	Trinidad and Tobago
BJ	Benin	IE	Ireland	MR	Mauritania	UA	Ukraine
BR	Brazil	IL	Israel	MW	Malawi	UG	Uganda
BY	Belarus	IS	Iceland	MX	Mexico	US	United States of America
CA	Canada	IT	Italy	NE	Niger	UZ	Uzbekistan
CF	Central African Republic	JP	Japan	NL	Netherlands	VN	Viet Nam
CG	Congo	KE	Kenya	NO	Norway	YU	Yugoslavia
CH	Switzerland	KG	Kyrgyzstan	NZ	New Zealand	ZW	Zimbabwe
CI	Côte d'Ivoire	KP	Democratic People's Republic of Korea	PL	Poland		
CM	Cameroon	KR	Republic of Korea	PT	Portugal		
CN	China	KZ	Kazakistan	RO	Romania		
CU	Cuba	LC	Saint Lucia	RU	Russian Federation		
CZ	Czech Republic	LI	Liechtenstein	SD	Sudan		
DE	Germany	LK	Sri Lanka	SE	Sweden		
DK	Denmark	LR	Liberia	SG	Singapore		
EE	Estonia						

PYRIDINE.IMINE POLYMERISATION CATALYSTS

The present invention relates to transition metal complex compounds, to polymerisation catalysts based thereon and to their use in the polymerisation and copolymerisation of olefins.

5 The use of certain transition metal compounds to polymerise 1-olefins, for example, ethylene, is well established in the prior art. The use of Ziegler-Natta catalysts, for example, those catalysts produced by activating titanium halides with organometallic compounds such as triethylaluminium, is fundamental to many commercial processes for manufacturing polyolefins. Over the last twenty or thirty years, advances in the technology have led to the development of Ziegler-Natta catalysts which have such high
10 activities that olefin polymers and copolymers containing very low concentrations of residual catalyst can be produced directly in commercial polymerisation processes. The quantities of residual catalyst remaining in the produced polymer are so small as to render unnecessary their separation and removal for most commercial applications. Such processes can be operated by polymerising the monomers in the gas phase, or in solution
15 or in suspension in a liquid hydrocarbon diluent. Polymerisation of the monomers can be carried out in the gas phase (the "gas phase process"), for example by fluidising under polymerisation conditions a bed comprising the target polyolefin powder and particles of the desired catalyst using a fluidising gas stream comprising the gaseous monomer. In the so-called "solution process" the (co)polymerisation is conducted by introducing the
20 monomer into a solution or suspension of the catalyst in a liquid hydrocarbon diluent under conditions of temperature and pressure such that the produced polyolefin forms as a solution in the hydrocarbon diluent. In the "slurry process" the temperature, pressure

and choice of diluent are such that the produced polymer forms as a suspension in the liquid hydrocarbon diluent. These processes are generally operated at relatively low pressures (for example 10-50 bar) and low temperature (for example 50 to 150°C).

Commodity polyethylenes are commercially produced in a variety of different types
5 and grades. Homopolymerisation of ethylene with transition metal based catalysts leads to the production of so-called "high density" grades of polyethylene. These polymers have relatively high stiffness and are useful for making articles where inherent rigidity is required. Copolymerisation of ethylene with higher 1-olefins (e.g. butene, hexene or octene) is employed commercially to provide a wide variety of copolymers differing in
10 density and in other important physical properties. Particularly important copolymers made by copolymerising ethylene with higher 1-olefins using transition metal based catalysts are the copolymers having a density in the range of 0.91 to 0.93. These copolymers which are generally referred to in the art as "linear low density polyethylene" are in many respects similar to the so called "low density" polyethylene produced by the
15 high pressure free radical catalysed polymerisation of ethylene. Such polymers and copolymers are used extensively in the manufacture of flexible blown film.


In recent years the use of certain metallocene catalysts (for example biscyclopentadienylzirconiumdichloride activated with alumoxane) has provided catalysts with potentially high activity. However, metallocene catalysts of this type suffer from a
20 number of disadvantages, for example, high sensitivity to impurities when used with commercially available monomers, diluents and process gas streams, the need to use large quantities of expensive alumoxanes to achieve high activity, and difficulties in putting the catalyst on to a suitable support.

Onggo, Craig, Rae and Goodwin (*Aust. J. Chem.* 1991, 44, 331) describe the
25 preparation of two hydrazone derivatives of 2,2' bipyridine-6-carbaldehyde which were subsequently complexed to iron (II), cobalt (II) and nickel (II) to produce bis(ligand) complexes.

An object of the present invention is to provide a novel catalyst suitable for polymerising and oligomerising monomers, for example, olefins such as α -olefins
30 containing from 2 to 20 carbon atoms, and especially for polymerising ethylene alone, propylene alone, or for copolymerising ethylene or propylene with other 1-olefins such as C₂₋₂₀ α -olefins. A further object of the invention is to provide an improved process for

the polymerisation of olefins, especially of ethylene alone or the copolymerisation of ethylene or propylene with higher 1-olefins to provide homopolymers and copolymers having controllable molecular weights. For example, using the catalysts of the present invention there can be made a wide variety of products such as, for example, liquid polyolefins, oligomers, linear α -olefins, branched α -olefins, resinous or tacky polyolefins, solid polyolefins suitable for making flexible film and solid polyolefins having high stiffness.

The present invention provides in one aspect a compound having the Formula (I)

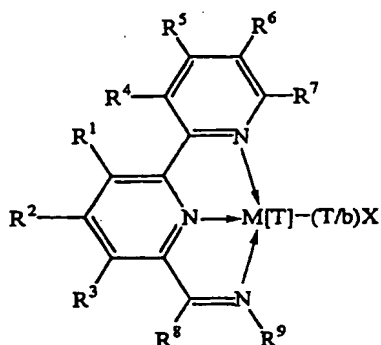

10 • Formula (I)


wherein M is Fe[II], Fe[III], Co[I], Co[II], Co[III], Mn[I], Mn[II], Mn[III], Mn[IV], Ru[II], Ru[III] or Ru[IV]; T is the oxidation state of the metal M; X represents an atom or group covalently or ionically bonded to the metal M; b is the valency of the atom or group X; R^1 to R^9 are each independently selected from hydrogen, halogen, hydrocarbyl, substituted hydrocarbyl, heterohydrocarbyl, substituted heterohydrocarbyl or SiR'_3 , where each R' is independently selected from hydrogen, halogen, hydrocarbyl, substituted hydrocarbyl, heterohydrocarbyl, substituted heterohydrocarbyl, except that R^9 is not heterohydrocarbyl or substituted heterohydrocarbyl.

15 R^1 to R^7 are preferably hydrogen, and R^8 is preferably hydrogen, methyl, ethyl, propyl or benzyl.

20 R^9 is preferably selected from substituted or unsubstituted alicyclic, heterocyclic or aromatic groups, for example, phenyl, 1-naphthyl, 2-naphthyl, 2-methylphenyl, 2-ethylphenyl, 2,6-diisopropylphenyl, 2,3-diisopropylphenyl, 2,4-diisopropylphenyl, 2,6-di-n-butylphenyl, 2,6-dimethylphenyl, 2,3-dimethylphenyl, 2,4-dimethylphenyl, 2-t-butylphenyl, 2,6-diphenylphenyl, 2,4,6-trimethylphenyl, 2,6-trifluoromethylphenyl, 4-

bromo-2,6-dimethylphenyl, 3,5 dichloro-2,6-diethylphenyl, and 2,6-bis(2,6-dimethylphenyl)phenyl, cyclohexyl and pyridinyl.

In a preferred embodiment R^9 is represented by the group "Q"



Group Q

wherein R^{21} to R^{25} are independently selected from hydrogen, halogen, hydrocarbyl, substituted hydrocarbyl, heterohydrocarbyl or substituted heterohydrocarbyl; when any
 10 two or more of R^{21} to R^{25} are hydrocarbyl, substituted hydrocarbyl, heterohydrocarbyl or substituted heterohydrocarbyl, said two or more can be linked to form one or more cyclic substituents. It is particularly preferred that R^{23} and R^{25} are both hydrogen, R^{24} is hydrogen or C_1 - C_4 alkyl, and R^{21} and R^{22} are both C_1 - C_4 alkyl. Preferred C_1 - C_4 alkyl groups for R^{21} , R^{22} and R^{24} include methyl, isopropyl or t-butyl. -

15 The ring system Q is preferably 2,6-hydrocarbylphenyl or fused-ring polyaromatic, for example, 1-naphthyl, 2-naphthyl, 1-phenanthrenyl and 8-quinolinyl.

Preferably at least one of R^{21} and R^{22} is hydrocarbyl, substituted hydrocarbyl, heterohydrocarbyl or substituted heterohydrocarbyl, in particular methyl, ethyl, n-propyl, iso-propyl, n-butyl, sec-butyl, tert.-butyl, n-pentyl, neopentyl, n-hexyl, 4-methylpentyl, n-
 20 octyl, phenyl and benzyl.

Each of the nitrogen atoms is coordinated to the metal by a "dative" bond, ie a bond formed by donation of a lone pair of electrons from the nitrogen atom. The remaining bonds on each nitrogen are covalent bonds formed by electron sharing with the organic ligand.

25 The atom or group represented by X in the compounds of Formula (I) can be, for example, selected from halide, sulphate, nitrate, thiolate, thiocarboxylate, BF_4^- , PF_6^- , hydride, hydrocarbyloxy, carboxylate, hydrocarbyl, substituted hydrocarbyl and heterohydrocarbyl, or β -diketonates. Examples of such atoms or groups are chloride,

bromide, methyl, ethyl, propyl, butyl, octyl, decyl, phenyl, benzyl, methoxide, ethoxide, isopropoxide, tosylate, triflate, formate, acetate, phenoxide and benzoate. Preferred examples of the atom or group X in the compounds of Formula (I) are halide, for example, chloride, bromide; hydride; hydrocarbyloxy, for example, methoxide, ethoxide, isopropoxide, phenoxide; carboxylate, for example, formate, acetate, benzoate; hydrocarbyl, for example, methyl, ethyl, propyl, butyl, octyl, decyl, phenyl, benzyl; substituted hydrocarbyl; heterohydrocarbyl; tosylate; and triflate. Preferably X is selected from halide, hydride and hydrocarbyl. Chloride is particularly preferred.

Examples of complexes of the present invention include 6-[1-(2,6 diisopropylphenylimino)ethyl]-2,2'-bipyridyl iron dichloride.

The present invention further provides a polymerisation catalyst comprising (1) a compound having the Formula (I) or (II) as hereinbefore defined, and (2) an activating quantity of at least one activator compound.

The activator compound for the catalyst of the present invention is suitably selected from organoaluminium compounds and hydrocarbylboron compounds. Suitable organoaluminium compounds include compounds of the formula AlR_3 , where each R is independently C_1 - C_{12} alkyl or halo. Examples include trimethylaluminium (TMA), triethylaluminium (TEA), tri-isobutylaluminium (TIBA), tri-n-octylaluminium, methylaluminium dichloride, ethylaluminium dichloride, dimethylaluminium chloride, diethylaluminium chloride, ethylaluminiumsesquichloride, methylaluminiumsesquichloride, and alumoxanes. Alumoxanes are well known in the art as typically the oligomeric compounds which can be prepared by the controlled addition of water to an alkylaluminium compound, for example trimethylaluminium. Such compounds can be linear, cyclic or mixtures thereof. Commercially available alumoxanes are generally believed to be mixtures of linear and cyclic compounds. The cyclic alumoxanes can be represented by the formula $[R^{16}AlO]_s$, and the linear alumoxanes by the formula $R^{17}(R^{18}AlO)_s$, wherein s is a number from about 2 to 50, and wherein R^{16} , R^{17} , and R^{18} represent hydrocarbyl groups, preferably C_1 to C_6 alkyl groups, for example methyl, ethyl or butyl groups. Alkylalumoxanes such as methylalumoxane (MAO) are preferred.

Mixtures of alkylalumoxanes and trialkylaluminium compounds are particularly preferred, such as MAO with TMA or TIBA. In this context it should be noted that the

term "alkylalumoxane" as used in this specification includes alkylalumoxanes available commercially which may contain a proportion, typically about 10wt%, but optionally up to 50wt%, of the corresponding trialkylaluminium; for instance, commercial MAO usually contains approximately 10wt% trimethylaluminium (TMA), whilst commercial MMAO contains both TMA and TIBA. Quantities of alkylalumoxane quoted herein include such trialkylaluminium impurities, and accordingly quantities of trialkylaluminium compounds quoted herein are considered to comprise compounds of the formula AlR_3 additional to any AlR_3 compound incorporated within the alkylalumoxane when present.

Examples of suitable hydrocarbylboron compounds are boroxines, trimethylboron, triethylboron, dimethylphenylammoniumtetra(phenyl)borate, trityltetra(phenyl)borate, triphenylboron, dimethylphenylammonium tetra(pentafluorophenyl)borate, sodium tetrakis[(bis-3,5-trifluoromethyl)phenyl]borate, $H^+(OEt_2)[(bis-3,5-trifluoromethyl)phenyl]borate$, trityltetra(pentafluorophenyl)borate and tris(pentafluorophenyl) boron.

In the preparation of the catalysts of the present invention the quantity of activating compound selected from organoaluminium compounds and hydrocarbylboron compounds to be employed is easily determined by simple testing, for example, by the preparation of small test samples which can be used to polymerise small quantities of the monomer(s) and thus to determine the activity of the produced catalyst. It is generally found that the quantity employed is sufficient to provide 0.1 to 20,000 atoms, preferably 1 to 2000 atoms of metal in the compound of Formula (I).

A further aspect of the present invention provides a polymerisation catalyst system comprising (1) a compound of the Formula (I) or (II), (2) an activating quantity of at least one activator compound selected from organoaluminium and hydrocarbylboron compounds, and (3) a neutral Lewis base.

Neutral Lewis bases are well known in the art of Ziegler-Natta catalyst polymerisation technology. Examples of classes of neutral Lewis bases suitably employed in the present invention are unsaturated hydrocarbons, for example, alkenes (other than 1-olefins) or alkynes, primary, secondary and tertiary amines, amides, phosphoramides, phosphines, phosphites, ethers, thioethers, nitriles, carbonyl compounds, for example, esters, ketones, aldehydes, carbon monoxide and carbon dioxide, sulphoxides, sulphones and boroxines. Although 1-olefins are capable of acting

as neutral Lewis bases, for the purposes of the present invention they are regarded as monomer or comonomer 1-olefins and not as neutral Lewis bases *per se*. However, alkenes which are internal olefins, for example, 2-butene and cyclohexene are regarded as neutral Lewis bases in the present invention. Preferred Lewis bases are tertiary amines and aromatic esters, for example, dimethylaniline, diethylaniline, tributylamine, ethylbenzoate and benzylbenzoate. In this particular aspect of the present invention, components (1), (2) and (3) of the catalyst system can be brought together simultaneously or in any desired order. However, if components (2) and (3) are compounds which interact together strongly, for example, form a stable compound together, it is preferred to bring together either components (1) and (2) or components (1) and (3) in an initial step before introducing the final defined component. Preferably components (1) and (3) are contacted together before component (2) is introduced. The quantities of components (1) and (2) employed in the preparation of this catalyst system are suitably as described above in relation to the catalysts of the present invention. The quantity of the neutral Lewis Base [component (3)] is preferably such as to provide a ratio of component (1):component (3) in the range 100:1 to 1:1000, most preferably in the range 1:1 to 1:20. Components (1), (2) and (3) of the catalyst system can be brought together, for example, as the neat materials, as a suspension or solution of the materials in a suitable diluent or solvent (for example a liquid hydrocarbon), or, if at least one of the components is volatile, by utilising the vapour of that component. The components can be brought together at any desired temperature. Mixing the components together at room temperature is generally satisfactory. Heating to higher temperatures e.g. up to 120°C can be carried out if desired, e.g. to achieve better mixing of the components. It is preferred to carry out the bringing together of components (1), (2) and (3) in an inert atmosphere (e.g. dry nitrogen) or *in vacuo*. If it is desired to use the catalyst on a support material (see below), this can be achieved, for example, by performing the catalyst system comprising components (1), (2) and (3) and impregnating the support material preferably with a solution thereof, or by introducing to the support material one or more of the components simultaneously or sequentially. If desired the support material itself can have the properties of a neutral Lewis base and can be employed as, or in place of, component (3). An example of a support material having neutral Lewis base properties is poly(aminostyrene) or a copolymer of styrene and aminostyrene (i.e.

vinylaniline).

The catalysts of the present invention can if desired comprise more than one of the defined compounds. Alternatively, the catalysts of the present invention can also include one or more other types of transition metal compounds or catalysts, for example, 5 nitrogen containing Fe, Co or V catalysts such as those described in our copending applications PCT/GB98/02638 and GB 9903402.7. Examples of such other catalysts include 2,6-diacetylpyridinebis(2,4,6-trimethyl anil)FeCl₂. Other transition metal compounds include those of the type used in conventional Ziegler-Natta catalyst systems, 10 metallocene-based catalysts, monocyclopentadienyl- or constrained geometry based catalysts, or heat activated supported chromium oxide catalysts (e.g. Phillips-type catalyst).

The catalysts of the present invention can be unsupported or supported on a support material, for example, silica, alumina, MgCl₂ or zirconia, or on a polymer or prepolymer, for example polyethylene, polypropylene, polystyrene, or 15 poly(aminostyrene).

If desired the catalysts can be formed in situ in the presence of the support material, or the support material can be pre-impregnated or premixed, simultaneously or sequentially, with one or more of the catalyst components. The catalysts of the present invention can if desired be supported on a heterogeneous catalyst, for example, a 20 magnesium halide supported Ziegler Natta catalyst, a Phillips type (chromium oxide) supported catalyst or a supported metallocene catalyst. Formation of the supported catalyst can be achieved for example by treating the transition metal compounds of the present invention with alumoxane in a suitable inert diluent, for example a volatile hydrocarbon, slurring a particulate support material with the product and evaporating 25 the volatile diluent. The produced supported catalyst is preferably in the form of a free-flowing powder. The quantity of support material employed can vary widely, for example from 100,000 to 1 grams per gram of metal present in the transition metal compound.

The present invention further provides a process for the polymerisation and 30 copolymerisation of 1-olefins, comprising contacting the monomeric olefin under polymerisation conditions with the polymerisation catalyst or catalyst system of the present invention. This process can produce products ranging from high molecular

weight polyolefins to low molecular weight liquid products such as linear α -olefins.

A preferred process comprises the steps of :

- a) preparing a prepolymer-based catalyst by contacting one or more 1-olefins with a catalyst system, and
- 5 b) contacting the prepolymer-based catalyst with one or more 1-olefins, wherein the catalyst system is as defined above.

In the text hereinbelow, the term "catalyst" is intended to include "catalyst system" as defined previously and also "prepolymer-based catalyst" as defined above.

The polymerisation conditions can be, for example, solution phase, slurry phase,
10 gas phase or bulk phase, with polymerisation temperatures ranging from -100°C to $+300^{\circ}\text{C}$, and at pressures of atmospheric and above, particularly from 140 to 4100 kPa. If desired, the catalyst can be used to polymerise ethylene under high pressure/high temperature process conditions wherein the polymeric material forms as a melt in supercritical ethylene. Preferably the polymerisation is conducted under gas phase
15 fluidised bed or stirred bed conditions.

Suitable monomers for use in the polymerisation process of the present invention are, for example, ethylene and C_{2-20} α -olefins, specifically propylene, 1-butene, 1-pentene, 1-hexene, 4-methylpentene-1, 1-heptene, 1-octene, 1-nonene, 1-decene, 1-undecene, 1-dodecene, 1-tridecene, 1-tetradecene, 1-pentadecene, 1-hexadecene, 1-heptadecene, 1-octadecene, 1-nonadecene, and 1-eicosene. Other monomers include
20 methyl methacrylate, methyl acrylate, butyl acrylate, acrylonitrile, vinyl acetate, and styrene. Preferred monomers for homopolymerisation processes are ethylene and propylene.

The catalysts and process of the invention can also be used for copolymerising
25 ethylene or propylene with each other or with other 1-olefins such as 1-butene, 1-hexene, 4-methylpentene-1, and octene, or with other monomeric materials, for example, methyl methacrylate, methyl acrylate, butyl acrylate, acrylonitrile, vinyl acetate, and styrene. Polymerisation of 1-olefins with dienes, particularly non-conjugated dienes, such as 1,4 pentadiene, 1,5-hexadiene, cyclopentadiene and ethylene norbornadiene is also possible.
30 In particular, ethylene/1-olefin/diene terpolymers may be made by the process of the invention where the diene is as above and the other 1-olefin is preferably propylene.

Irrespective of the polymerisation or copolymerisation technique employed,

polymerisation or copolymerisation is typically carried out under conditions that substantially exclude oxygen, water, and other materials that act as catalyst poisons. Also, polymerisation or copolymerisation can be carried out in the presence of additives to control polymer or copolymer molecular weights.

5 The use of hydrogen gas as a means of controlling the average molecular weight of the polymer or copolymer applies generally to the polymerisation process of the present invention. For example, hydrogen can be used to reduce the average molecular weight of polymers or copolymers prepared using gas phase, slurry phase, bulk phase or solution
10 phase polymerisation conditions. The quantity of hydrogen gas to be employed to give the desired average molecular weight can be determined by simple "trial and error" polymerisation tests.

 The polymerisation process of the present invention provides polymers and copolymers, especially ethylene polymers, at remarkably high productivity (based on the amount of polymer or copolymer produced per unit weight of complex employed in the
15 catalyst system). This means that relatively very small quantities of transition metal complex are consumed in commercial processes using the process of the present invention. It also means that when the polymerisation process of the present invention is operated under polymer recovery conditions that do not employ a catalyst separation step, thus leaving the catalyst, or residues thereof, in the polymer (e.g. as occurs in most
20 commercial slurry and gas phase polymerisation processes), the amount of transition metal complex in the produced polymer can be very small.

 Slurry phase polymerisation conditions or gas phase polymerisation conditions are particularly useful for the production of high or low density grades of polyethylene, and polypropylene. In these processes the polymerisation conditions can be batch, continuous
25 or semi-continuous. Furthermore, one or more reactors may be used, e.g. from two to five reactors in series. Different reaction conditions, such as different temperatures or hydrogen concentrations may be employed in the different reactors. In the slurry phase process and the gas phase process, the catalyst is generally metered and transferred into the polymerisation zone in the form of a particulate solid either as a dry powder (e.g.
30 with an inert gas) or as a slurry. This solid can be, for example, a solid catalyst system formed from the one or more of complexes of the invention and an activator with or without other types of catalysts, or can be the solid catalyst alone with or without other

types of catalysts. In the latter situation, the activator can be fed to the polymerisation zone, for example as a solution, separately from or together with the solid catalyst.

Preferably the catalyst system or the transition metal complex component of the catalyst system employed in the slurry polymerisation and gas phase polymerisation is supported on one or more support materials. Most preferably the catalyst system is supported on the support material prior to its introduction into the polymerisation zone. Suitable support materials are, for example, silica, alumina, zirconia, talc, kieselguhr, or magnesia. Impregnation of the support material can be carried out by conventional techniques, for example, by forming a solution or suspension of the catalyst components in a suitable diluent or solvent, and slurrying the support material therewith. The support material thus impregnated with catalyst can then be separated from the diluent for example, by filtration or evaporation techniques. Once the polymer product is discharged from the reactor, any associated and absorbed hydrocarbons are substantially removed, or degassed, from the polymer by, for example, pressure let-down or gas purging using fresh or recycled steam, nitrogen or light hydrocarbons (such as ethylene). Recovered gaseous or liquid hydrocarbons may be recycled to the polymerisation zone.

In the slurry phase polymerisation process the solid particles of catalyst, or supported catalyst, are fed to a polymerisation zone either as dry powder or as a slurry in the polymerisation diluent. The polymerisation diluent is compatible with the polymer(s) and catalyst(s), and may be an alkane such as hexane, heptane, isobutane, or a mixture of hydrocarbons or paraffins. Preferably the particles are fed to a polymerisation zone as a suspension in the polymerisation diluent. The polymerisation zone can be, for example, an autoclave or similar reaction vessel, or a continuous loop reactor, e.g. of the type well-know in the manufacture of polyethylene by the Phillips Process. When the polymerisation process of the present invention is carried out under slurry conditions the polymerisation is preferably carried out at a temperature above 0°C, most preferably above 15°C. The polymerisation temperature is preferably maintained below the temperature at which the polymer commences to soften or sinter in the presence of the polymerisation diluent. If the temperature is allowed to go above the latter temperature, fouling of the reactor can occur. Adjustment of the polymerisation within these defined temperature ranges can provide a useful means of controlling the average molecular weight of the produced polymer. A further useful means of controlling the molecular

weight is to conduct the polymerisation in the presence of hydrogen gas which acts as chain transfer agent. Generally, the higher the concentration of hydrogen employed, the lower the average molecular weight of the produced polymer.

5 In bulk polymerisation processes, liquid monomer such as propylene is used as the polymerisation medium.

Methods for operating gas phase polymerisation processes are well known in the art. Such methods generally involve agitating (e.g. by stirring, vibrating or fluidising) a bed of catalyst, or a bed of the target polymer (i.e. polymer having the same or similar physical properties to that which it is desired to make in the polymerisation process) containing a catalyst, and feeding thereto a stream of monomer at least partially in the 10 gaseous phase, under conditions such that at least part of the monomer polymerises in contact with the catalyst in the bed. The bed is generally cooled by the addition of cool gas (e.g. recycled gaseous monomer) and/or volatile liquid (e.g. a volatile inert hydrocarbon, or gaseous monomer which has been condensed to form a liquid). The 15 polymer produced in, and isolated from, gas phase processes forms directly a solid in the polymerisation zone and is free from, or substantially free from liquid. As is well known to those skilled in the art, if any liquid is allowed to enter the polymerisation zone of a gas phase polymerisation process the quantity of liquid in the polymerisation zone is small in relation to the quantity of polymer present. This is in contrast to "solution 20 phase" processes wherein the polymer is formed dissolved in a solvent, and "slurry phase" processes wherein the polymer forms as a suspension in a liquid diluent.

The gas phase process can be operated under batch, semi-batch, or so-called "continuous" conditions. It is preferred to operate under conditions such that monomer is continuously recycled to an agitated polymerisation zone containing polymerisation 25 catalyst, make-up monomer being provided to replace polymerised monomer, and continuously or intermittently withdrawing produced polymer from the polymerisation zone at a rate comparable to the rate of formation of the polymer, fresh catalyst being added to the polymerisation zone to replace the catalyst withdrawn from the polymerisation zone with the produced polymer.

30 For typical production of impact copolymers, homopolymer formed from the first monomer in a first reactor is reacted with the second monomer in a second reactor. For manufacture of propylene/ethylene impact copolymer in a gas-phase process, propylene

is polymerized in a first reactor; reactive polymer transferred to a second reactor in which ethylene or other comonomer is added. The result is an intimate mixture of a isotactic polypropylene chains with chains of a random propylene/ethylene copolymer. A random copolymer typically is produced in a single reactor in which a minor amount of a comonomer (typically ethylene) is added to polymerizing chains of propylene.

Methods for operating gas phase fluidised bed processes for making polyethylene, ethylene copolymers and polypropylene are well known in the art. The process can be operated, for example, in a vertical cylindrical reactor equipped with a perforated distribution plate to support the bed and to distribute the incoming fluidising gas stream through the bed. The fluidising gas circulating through the bed serves to remove the heat of polymerisation from the bed and to supply monomer for polymerisation in the bed. Thus the fluidising gas generally comprises the monomer(s) normally together with some inert gas (e.g. nitrogen or inert hydrocarbons such as methane, ethane, propane, butane, pentane or hexane) and optionally with hydrogen as molecular weight modifier. The hot fluidising gas emerging from the top of the bed is led optionally through a velocity reduction zone (this can be a cylindrical portion of the reactor having a wider diameter) and, if desired, a cyclone and or filters to disentrain fine solid particles from the gas stream. The hot gas is then led to a heat exchanger to remove at least part of the heat of polymerisation. Catalyst is preferably fed continuously or at regular intervals to the bed. At start up of the process, the bed comprises fluidisable polymer which is preferably similar to the target polymer. Polymer is produced continuously within the bed by the polymerisation of the monomer(s). Preferably means are provided to discharge polymer from the bed continuously or at regular intervals to maintain the fluidised bed at the desired height. The process is generally operated at relatively low pressure, for example, at 10 to 50 bars, and at temperatures for example, between 50 and 120 °C. The temperature of the bed is maintained below the sintering temperature of the fluidised polymer to avoid problems of agglomeration.

In the gas phase fluidised bed process for polymerisation of olefins the heat evolved by the exothermic polymerisation reaction is normally removed from the polymerisation zone (i.e. the fluidised bed) by means of the fluidising gas stream as described above. The hot reactor gas emerging from the top of the bed is led through one or more heat exchangers wherein the gas is cooled. The cooled reactor gas,

together with any make-up gas, is then recycled to the base of the bed. In the gas phase fluidised bed polymerisation process of the present invention it is desirable to provide additional cooling of the bed (and thereby improve the space time yield of the process) by feeding a volatile liquid to the bed under conditions such that the liquid evaporates in the bed thereby absorbing additional heat of polymerisation from the bed by the "latent heat of evaporation" effect. When the hot recycle gas from the bed enters the heat exchanger, the volatile liquid can condense out. In one embodiment of the present invention the volatile liquid is separated from the recycle gas and reintroduced separately into the bed. Thus, for example, the volatile liquid can be separated and sprayed into the bed. In another embodiment of the present invention the volatile liquid is recycled to the bed with the recycle gas. Thus the volatile liquid can be condensed from the fluidising gas stream emerging from the reactor and can be recycled to the bed with recycle gas, or can be separated from the recycle gas and then returned to the bed.

The method of condensing liquid in the recycle gas stream and returning the mixture of gas and entrained liquid to the bed is described in EP-A-0089691 and EP-A-0241947. It is preferred to reintroduce the condensed liquid into the bed separate from the recycle gas using the process described in our US Patent 5541270, the teaching of which is hereby incorporated into this specification.

When using the catalysts of the present invention under gas phase polymerisation conditions, the catalyst, or one or more of the components employed to form the catalyst can, for example, be introduced into the polymerisation reaction zone in liquid form, for example, as a solution in an inert liquid diluent. Thus, for example, the transition metal component, or the activator component, or both of these components can be dissolved or slurried in a liquid diluent and fed to the polymerisation zone. Under these circumstances it is preferred the liquid containing the component(s) is sprayed as fine droplets into the polymerisation zone. The droplet diameter is preferably within the range 1 to 1000 microns. EP-A-0593083, the teaching of which is hereby incorporated into this specification, discloses a process for introducing a polymerisation catalyst into a gas phase polymerisation. The methods disclosed in EP-A-0593083 can be suitably employed in the polymerisation process of the present invention if desired.

Although not usually required, upon completion of polymerisation or copolymerisation, or when it is desired to terminate polymerisation or copolymerisation

or at least temporarily deactivate the catalyst or catalyst component of this invention, the catalyst can be contacted with water, alcohols, acetone, or other suitable catalyst deactivators a manner known to persons of skill in the art.

5 Homopolymerisation of ethylene with the catalysts of the invention may produce so-called "high density" grades of polyethylene. These polymers have relatively high stiffness and are useful for making articles where inherent rigidity is required. Copolymerisation of ethylene with higher 1-olefins (e.g. butene, hexene or octene) can provide a wide variety of copolymers differing in density and in other important physical properties. Particularly important copolymers made by copolymerising ethylene with
10 higher 1-olefins with the catalysts of the invention are the copolymers having a density in the range of 0.91 to 0.93. These copolymers which are generally referred to in the art as linear low density polyethylene, are in many respects similar to the so called low density polyethylene produced by the high pressure free radical catalysed polymerisation of ethylene. Such polymers and copolymers are used extensively in the manufacture of
15 flexible blown film.

Propylene polymers produced by the process of the invention include propylene homopolymer and copolymers of propylene with less than 50 mole % ethylene or other
20 alpha-olefin such as butene-1, pentene-1, 4-methylpentene-1, or hexene-1, or mixtures thereof. Propylene polymers also may include copolymers of propylene with minor amounts of a copolymerizable monomer. Typically, most useful are normally-solid polymers of propylene containing polypropylene crystallinity, random copolymers of propylene with up to about 10 wt.% ethylene, and impact copolymers containing up to about 20 wt.% ethylene or other alpha-olefin. Polypropylene homopolymers may contain a small amount (typically below 2 wt.%) of other monomers to the extent the
25 properties of the homopolymer are not affected significantly.

Propylene polymers may be produced which are normally solid, predominantly isotactic, poly α -olefins. Levels of stereorandom by-products are sufficiently low so that useful products can be obtained without separation thereof. Typically, useful propylene
30 homopolymers show polypropylene crystallinity and have isotactic indices above 90 and many times above 95. Copolymers typically will have lower isotactic indices, typically above 80-85.

Depending upon polymerisation conditions known in the art, propylene polymers

with melt flow rates from below 1 to above 1000 may be produced in a reactor. For many applications, polypropylenes with a MFR from 2 to 100 are typical. Some uses such as for spunbonding may use a polymer with an MFR of 500 to 2000.

5 Depending upon the use of the polymer product, minor amounts of additives are typically incorporated into the polymer formulation such as acid scavengers, antioxidants, stabilizers, and the like. Generally, these additives are incorporated at levels of about 25 to 2000 ppm, typically from about 50 to about 1000 ppm, and more typically 400 to 1000 ppm, based on the polymer.


10 In use, polymers or copolymers made according to the invention in the form of a powder are conventionally compounded into pellets. Examples of uses for polymer compositions made according to the invention include use to form fibres, extruded films, tapes, spunbonded webs, moulded or thermoformed products, and the like. The polymers may be blown into films, or may be used for making a variety of moulded or extruded articles such as pipes, and containers such as bottles or drums. Specific
15 additive packages for each application may be selected as known in the art. Examples of supplemental additives include slip agents, anti-blocks, anti-stats, mould release agents, primary and secondary anti-oxidants, clarifiers, nucleants, uv stabilizers, and the like. Classes of additives are well known in the art and include phosphite antioxidants, hydroxylamine (such as N,N-dialkyl hydroxylamine) and amine oxide (such as dialkyl
20 methyl amine oxide) antioxidants, hindered amine light (uv) stabilizers, phenolic stabilizers, benzofuranone stabilizers, and the like. Various olefin polymer additives are described in U.S. patents 4,318,845, 4,325,863, 4,590,231, 4,668,721, 4,876,300, 5,175,312, 5,276,076, 5,326,802, 5,344,860, 5,596,033, and 5,625,090.

25 Fillers such as silica, glass fibers, talc, and the like, nucleating agents, and colourants also may be added to the polymer compositions as known by the art.

The present invention is illustrated in the following Examples.


EXAMPLE 1

Preparation of 2-acetyl-6-bromo pyridine




Using a procedure based on a related preparation (J. E. Parks, B. E. Wagner and R. H. Holm, *J. Organomet. Chem.*, 1973, 56, 53), to a slurry of 2,6-dibromopyridine (14.85g, 0.062 mol) in ether (150ml) cooled to -78°C , n-butyllithium (1.6M in hexane; 39.2 ml, 0.062 mol) was added at such a rate that the temperature did not exceed -70°C .
5 After the addition was complete the reaction was allowed to warm to -40°C for 15 min and then cooled to -80°C . To this solution was added *N,N*-dimethylacetamide (8.4ml, 0.065mol). This solution was then allowed to stir at -40°C for 2 h, and then hydrolysed with saturated aqueous ammonium chloride (50ml). The aqueous layer was separated, washed with ether (2 x 25ml), the combined organic layers were dried (MgSO_4) and
10 concentrated. The resulting oil was purified by column chromatography on silica (20% ether: hexane) to afford 2-acetyl-6-bromo pyridine (6.33g, 51%) as a white solid.

Preparation of 6-bromo-2-(2'-methyl-1',3'-dioxolan-2'-yl)pyridine



Using a procedure based on a related preparation (E. C. Constable, F. Heitzler, M. Neuburger and M. Zehnder, *J. Am. Chem. Soc.*, 1997, 119, 5606), to a solution of 2-acetyl-6-bromo pyridine (6.00g, 30mmol) in benzene (90ml) was added 1,2-ethanediol (2.04ml, 36 mmol) and *p*-toluenesulfonic acid (0.60g, 3.00 mmol) and this solution was heated to reflux for 24 h using a Dean-Stark Head. The mixture was then allowed to cool to room temperature, aqueous NaOH (0.5M; 30ml) was added and the aqueous
20 layer was washed with benzene (30ml). The combined organic layers were washed with aqueous NaOH (0.5M; 2 x 20ml), then washed with water (2 x 20ml), dried (MgSO_4) and concentrated. The resulting oil was purified by column chromatography on neutral alumina (50% ether: hexane) to give 6-bromo-2-(2'-methyl-1',3'-dioxolan-2'-yl)pyridine (2.65g, 36%) as a light yellow solid.


25 Preparation of 2-(2-mercaptoethyl)pyridine



Using a procedure based on a related preparation (E. C. Constable, F. Heitzler, M. Neuburger and M. Zehnder, *J. Am. Chem. Soc.*, 1997, 119, 5606), to a solution of 2-


mercaptopyridine (11.00g, 99 mmol) in aqueous NaOH (1M; 100ml) was added ethyl iodide (8.1ml, 100mmol). This mixture was stirred for 15 h and then extracted with ether (3 x 50ml). The combined extracts were washed with aqueous NaOH (2M; 2 x 30ml), washed with brine (30ml) and dried (MgSO₄). Evaporation gave 2-(2-mercaptoethyl)pyridine (12.40g, 90%) as an orange oil.

Preparation of ethyl 2-pyridyl sulfoxide




Using a procedure based on a related preparation (E. C. Constable, F. Heitzler, M. Neuburger and M. Zehnder, *J. Am. Chem. Soc.*, 1997, 119, 5606), to a solution of 2-(2-mercaptoethyl)pyridine (12.20g, 87mmol) in methanol (185ml) was added magnesium monoperoxyphthalate (85% purity; 26.00g, 44mmol) in portions while the temperature was maintained at 0°C. The mixture was stirred for 15 h and then carefully concentrated by rotary evaporation, keeping the water bath temperature below 50°C, to produce a viscous slurry. To this was added water (200ml) and this was extracted with chloroform (3 x 30ml). The combined organic layers were washed with brine (2 x 30ml) and dried (MgSO₄). Concentration of this gave ethyl 2-pyridyl sulfoxide (10.53g, 78%) as a yellow liquid.

Preparation of 6-acetyl-2,2'-bipyridine



Using a procedure based on a related preparation (E. C. Constable, F. Heitzler, M. Neuburger and M. Zehnder, *J. Am. Chem. Soc.*, 1997, 119, 5606), to a slurry of 6-bromo-2-(2'-methyl-1',3'-dioxolan-2'-yl)pyridine (2.55g, 10.40mmol) in dry ether (80ml), cooled to -80°C, was added n-butyllithium (1.6M in hexanes; 7.50 ml, 12.5mmol) at such a rate that the temperature did not exceed -70°C. After 45 min at -40°C the mixture was cooled to -70°C and treated with ethyl 2-pyridyl sulfoxide (2.92g, 18.80mmol). The solution was stirred for 15 h at ambient temperature and then quenched with aqueous saturated ammonium chloride (35ml). The organic phase was separated, the aqueous layer was washed with ethyl acetate (2 x 25ml) and the combined

Preparation of 6-[1-(2,6-diisopropylphenylimino)ethyl]-2,2'-bipyridine-iron dichloride

FeCl₂ (0.12g, 0.98 mmol) was dissolved in hot n-butanol (13ml) at 80°C. 6-[1-
 (2,6-diisopropylphenylimino)ethyl]-2,2'-bipyridine (0.35g, 0.98mmol) was added and a
 5 further amount of n-butanol (2ml) was added. At this point the reaction turned blue.
 After stirring at 80°C for 1 h the reaction was allowed to cool to room temperature. The
 mixture was then concentrated to a few ml and was washed with ether (2 x 15ml) to
 provide 6-[1-(2,6-diisopropylphenylimino)ethyl]-2,2'-bipyridine-iron dichloride as a blue
 solid (0.36g, 76%). ¹H NMR (CDCl₃) 87.58 (s), 81.12 (s), 66.76 (s), 54.28 (s), 14.72
 10 (s), 13.09 (s), 9.06- -0.71 (m), -9.48 (s); MS (FAB+) m/z 484 (M⁺, 15, 448 (M-Cl⁺,
 100); HRMS (FAB+) For C₂₄H₂₇N₃Cl₂Fe calcd. 485.0902 found 485.0904.

EXAMPLE 2Polymerisation test

The catalyst 6-[1-(2,6-diisopropylphenylimino)ethyl]-2,2'-bipyridine-iron
 15 dichloride (4.8mg, 0.01mmol) and co-catalyst (methylalumoxane- "MAO") (10%
 solution in toluene; 0.7ml, 1.00mmol) was added to a Schlenk tube and dissolved in
 toluene (40ml). The tube was purged with ethylene and the contents were stirred and
 maintained under 1 bar ethylene for the duration of the polymerisation. After one hour
 the polymerisation was terminated by the addition of aqueous hydrogen chloride. The
 20 organic layer was separated, dried (MgSO₄) and concentrated.

EXAMPLE 3

A 0.3 litre autoclave was thoroughly purged by heating under nitrogen. Toluene
 (10ml) was introduced into the autoclave by syringe. The contents of the autoclave were
 then stirred at 25°C which was maintained by external circulation through the outer
 25 jacket of the vessel from a heater/cooler bath. The pressure and temperature of the
 autoclave were logged continuously and a solution of 30 micromoles of 6-[1-(2,6
 diisopropylphenylimino)ethyl]-2,2'-bipyridyl iron dichloride in toluene (30ml) was added
 together with 3 ml of 10 wt% methylaluminoxane (ex Albemarle 1.0mmol) and 2ml of

TMA solution. Ethylene was introduced in the reactor at overpressure of 1 bar and the reaction allowed to run overnight. The contents of the reactor were then vented and the reactor drained. The liquid phase was analysed by gas chromatography and shown to consist of toluene with a small amount (< 2 wt%) of 1-hexene.

5 **EXAMPLE 4**

The polymerisation of Example 3 above was repeated with the exception that the ethylene pressure was increased to 11 bar. After running for 16 hours, the gas phase was sampled and found to consist of the following 1-olefins (wt %):

	C ₂	-	83.4
10	C ₄	-	9.8
	C ₆	-	2.7
	C ₈	-	2.2

The reactor was then vented, the liquid contents drained and cooled. A little isopropanol was added to deactivate the catalyst. The liquid phase was then analysed and found to
15 contain in addition to solvents the following 1-olefins (relative wt %):

ethylene & 1-butene	89.8
1-hexene	6.5
1-octene	2.2
1-decene	1.0
1-dodecene	0.5
1-tetradecene	0.3
1-hexadecene	0.2
1-octadecene	0.1

EXAMPLE 5

A 1 litre autoclave was thoroughly purged by heating under nitrogen.
20 Methylaluminoxane (5ml of 10 wt% solution in toluene ex Albemarle) and toluene (250ml) were introduced into the autoclave by syringe. The contents of the autoclave were then stirred at 30°C which was maintained by external circulation through the outer jacket of the vessel from a heater/cooler bath. The pressure and temperature of the autoclave were logged continuously. Ethylene was introduced via a mass flow controller

to maintain the pressure in the reactor at 5 bar, and the mass of ethylene added was also logged. A solution of 51 micromoles of 6-{1-[2,6 diisopropylphenylimino]ethyl}-2,2'-bipyridyl iron dichloride in toluene was added together with 7.5 ml of 10% methylaluminoxane in toluene. A ethylene consumption rate equivalent to

5 160g/mmol(cat).h.bar was recorded.

At the end of the run the gas phase in the autoclave was sampled and found to contain (by gas chromatography) 1-butene and 1-hexene in mass ratios 9:1. The reactor was then drained, and the catalysts neutralised with a little isopropanol. Similar analysis of the liquid phase showed this to consist of a toluene solution containing the following

10 alpha-olefins in the weight percentages given:

1-octene	16.3
1-decene	10.3
1-dodecene	13.0
1-tetradecene	18.0
1-hexadecene	20.3
1-octadecene	13.5
1-eicosene	8.3

In addition a small amount of wax was also recovered.


15

20

25

Claims:


1. Complex having the Formula (I)

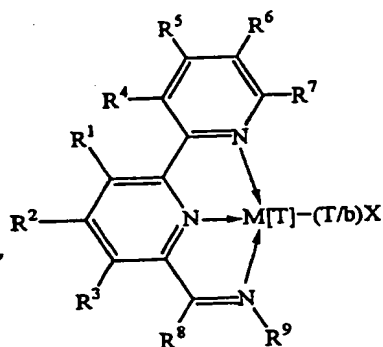

Formula (I)

- wherein M is Fe[II], Fe[III], Co[I], Co[II], Co[III], Mn[I], Mn[II], Mn[III], Mn[IV],
 5 Ru[II], Ru[III] or Ru[IV]; T is the oxidation state of the metal M; X represents an atom
 or group covalently or ionically bonded to the metal M; b is the valency of the atom or
 group X; R¹ to R⁹ are each independently selected from hydrogen, halogen, hydrocarbyl,
 substituted hydrocarbyl, heterohydrocarbyl, substituted heterohydrocarbyl or SiR'₃ where
 each R' is independently selected from hydrogen, halogen, hydrocarbyl, substituted
 10 hydrocarbyl, heterohydrocarbyl, substituted heterohydrocarbyl, except that R⁹ is not
 heterohydrocarbyl or substituted heterohydrocarbyl.
2. Complex according to claim 1 wherein R¹ to R⁷ are hydrogen.
3. Complex according to claim 1 or 2 wherein R⁸ is hydrogen, methyl, ethyl, propyl or
 benzyl.

4. Complex according to any preceding claim wherein R^9 is selected from phenyl, 1-naphthyl, 2-naphthyl, 2-methylphenyl, 2-ethylphenyl, 2,6-diisopropylphenyl, 2,3-diisopropylphenyl, 2,4-diisopropylphenyl, 2,6-di-n-butylphenyl, 2,6-dimethylphenyl, 2,3-dimethylphenyl, 2,4-dimethylphenyl, 2-t-butylphenyl, 2,6-diphenylphenyl, 2,4,6-trimethylphenyl, 2,6-trifluoromethylphenyl, 4-bromo-2,6-dimethylphenyl, 3,5-dichloro-2,6-diethylphenyl, 2,6-bis(2,6-dimethylphenyl)phenyl, cyclohexyl or pyridinyl.
5. Complex according to any of claims 1 to 3 wherein R^9 is represented by the group "Q"



10 Group Q

- wherein R^{21} to R^{25} are independently selected from hydrogen, halogen, hydrocarbyl, substituted hydrocarbyl, heterohydrocarbyl or substituted heterohydrocarbyl; and when any two or more of R^{21} to R^{25} are hydrocarbyl, substituted hydrocarbyl, heterohydrocarbyl or substituted heterohydrocarbyl, said two or more can be linked to form one or more cyclic substituents.
6. Complex according to claim 5 wherein R^{23} and R^{25} are both hydrogen, R^{24} is hydrogen or C_1 - C_4 alkyl, and R^{21} and R^{22} are both independently methyl, ethyl, n-propyl, iso-propyl, n-butyl, sec-butyl, tert.-butyl, n-pentyl, neopentyl, n-hexyl, 4-methylpentyl, n-octyl, phenyl or benzyl.
7. Complex according to any preceding claim wherein X is selected from halide, sulphate, nitrate, thiolate, thiocarboxylate, BF_4^- , PF_6^- , hydride, hydrocarbyloxy, carboxylate, hydrocarbyl, substituted hydrocarbyl and heterohydrocarbyl, and β -diketonates.
8. Complex according to claim 7 wherein X is selected from chloride, bromide, methyl, ethyl, propyl, butyl, octyl, decyl, phenyl, benzyl, methoxide, ethoxide, isopropoxide, tosylate, triflate, formate, acetate, phenoxide and benzoate.
9. Complex according to any preceding claim wherein M is Fe or Co.
10. Complex according to any preceding claim which comprises

6-[1-(2,6-diisopropylphenylimino)ethyl]-2,2'-bipyridine-iron dichloride.

11. Polymerisation catalyst comprising
 - (1) a complex as defined in any preceding claim, and
 - (2) an activating quantity of at least one activator compound.
- 5 12. Catalyst according to claim 11 wherein the activator is selected from organoaluminium compounds, hydrocarbylboron compounds and salts of a cationic oxidising agent and a non-coordinating compatible anion.
13. Catalyst according to claim 12 wherein the activator is selected from trimethylaluminium (TMA), triethylaluminium (TEA), tri-isobutylaluminium (TIBA), tri-10 n-octylaluminium, methylaluminium dichloride, ethylaluminium dichloride, dimethylaluminium chloride, diethylaluminium chloride, ethylaluminiumsesquichloride, methylaluminiumsesquichloride, and alumoxanes.
14. Catalyst according to any one of claims 10 to 12, further comprising a neutral Lewis base.
- 15 15. Catalyst according to claim 14 wherein the neutral Lewis base is selected from alkenes (other than 1-olefins) or alkynes, primary, secondary and tertiary amines, amides, phosphoramides, phosphines, phosphites, ethers, thioethers, nitriles, esters, ketones, aldehydes, carbon monoxide and carbon dioxide, sulphoxides, sulphones and boroxines.
16. Catalyst according to any one of claims 11 to 15 which is supported on a support 20 material comprising silica, alumina, $MgCl_2$ or zirconia, or on a polymer or prepolymer comprising polyethylene, polypropylene, polystyrene, or poly(aminostyrene).
17. Catalyst according to any one of claims 11 to 16 which comprises more than one complex as defined in any of claims 1 to 10, or a complex as defined in any of claims 1 to 10 plus a tridentate nitrogen-containing Fe or Co complex, which is preferably 6- 25 diacetylpyridinebis(2,4,6-trimethyl anil)FeCl₂.
18. Catalyst according to any one of claims 11 to 16 which comprises a complex as defined in any of claims 1 to 10 plus a further catalyst suitable for the polymerisation of 1-olefins, preferably a Ziegler-Natta catalyst system, metallocene-based catalyst, monocyclopentadienyl- or constrained geometry based catalyst, or heat activated 30 supported chromium oxide catalyst (e.g. Phillips-type catalyst).
19. Process for the polymerisation or copolymerisation of 1-olefins, comprising contacting a monomeric olefin under polymerisation conditions with a complex or

catalyst as defined in any preceding claim.

20. Process according to claim 19 comprising the steps of :

a) preparing a prepolymer-based catalyst by contacting one or more 1-olefins with a catalyst, and

5 b) contacting the prepolymer-based catalyst with one or more 1-olefins, wherein the catalyst is as defined in any of claims 11 to 18.

21. Process according to claim 19 or 20 wherein the polymerisation is conducted in the presence of hydrogen as a molecular weight modifier.

22. Process according to any one of claims 19 to 21 wherein the polymerisation
10 conditions are solution phase, slurry phase or gas phase.

23. Process according to claim 22 wherein the polymerisation is conducted under gas phase fluidised bed conditions.

24. Process according to claim 22 wherein the polymerisation is conducted in slurry phase in an autoclave or continuous loop reactor.

15 25. Process according to any one of claims 19 to 24 wherein the copolymerisation comprises formation of an ethylene/1-olefin/diene terpolymer in which the diene is preferably 1,4 pentadiene, 1,5-hexadiene, cyclopentadiene or ethylene norbornadiene, and the other 1-olefin is preferably propylene.

20 26. Use of a complex as defined in any of claims 1 to 10 as a catalyst for the polymerisation of 1-olefins.

25

30

INTERNATIONAL SEARCH REPORT

Intern. Appl. No.
PCT/GB 00/01023

A. CLASSIFICATION OF SUBJECT MATTER IPC 7 C07F15/00 C08F10/02 C08F4/70		
According to International Patent Classification (IPC) or to both national classification and IPC		
B. FIELDS SEARCHED Minimum documentation searched (classification system followed by classification symbols) IPC 7 C07F C08F		
Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched		
Electronic data base consulted during the international search (name of data base and, where practical, search terms used)		
C. DOCUMENTS CONSIDERED TO BE RELEVANT		
Category *	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X	DHOLAKIA, SMITA ET AL: "Equilibriums in complexes of N-heterocyclic molecules. Part 34. Iron binding by cerulomycins" J. CHEM. SOC., DALTON TRANS. (1984), (10), 2245-8, XP000907244 figures 1,3; table 2	1-3
A	GOODWIN, H. A. ET AL: "Metal complexes of 1,10-phenanthroline derivatives. VIII. Complexes of 1,10-phenanthroline-2-carbaldehyde imines" AUST. J. CHEM. (1974), 27(10), 2121-9, XP000911008 figure 1; table 1	1-10
--- /---		
<input checked="" type="checkbox"/> Further documents are listed in the continuation of box C.		
<input checked="" type="checkbox"/> Patent family members are listed in annex.		
* Special categories of cited documents :		
"A" document defining the general state of the art which is not considered to be of particular relevance	"T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention	
"E" earlier document but published on or after the international filing date	"X" document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone	
"L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)	"Y" document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art.	
"O" document referring to an oral disclosure, use, exhibition or other means	"8" document member of the same patent family	
"P" document published prior to the international filing date but later than the priority date claimed		
Date of the actual completion of the international search <p style="text-align: center;">5 June 2000</p>	Date of mailing of the international search report <p style="text-align: center;">15/06/2000</p>	
Name and mailing address of the ISA European Patent Office, P.B. 5818 Patentlaan 2 NL - 2200 HV Rijswijk Tel. (+31-70) 340-2040, Tx. 31 851 epo nl, Fax: (+31-70) 340-3018	Authorized officer <p style="text-align: center;">Parry, J</p>	

INTERNATIONAL SEARCH REPORT

International Application No
PCT/GB 00/01023

C.(Continuation) DOCUMENTS CONSIDERED TO BE RELEVANT		
Category *	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
A	JUDGE, JOHN S. ET AL: "Five-coordinate complexes of first transition series ions with 2,2',2''-terpyridine" J. INORG. NUCL. CHEM. (1967), 29(7), 1711-16 , XP000911025 abstract; table 1	1-10
A	WO 98 27124 A (DU PONT) 25 June 1998 (1998-06-25) figure 2	1-26

1

INTERNATIONAL SEARCH REPORT

Information on patent family members

International Application No

PCT/GB 00/01023

Patent document cited in search report	Publication date	Patent family member(s)	Publication date
WO 9827124 A	25-06-1998	AU 5711098 A	15-07-1998
		EP 0946609 A	06-10-1999
		NO 992930 A	10-08-1999
		PL 334300 A	14-02-2000
		US 5955555 A	21-09-1999